



PLAN VIEW

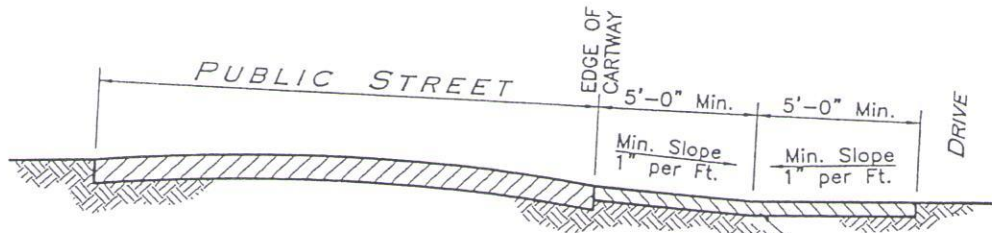

15" CMP, 15" RCP OR 15" HDPE (SMOOTH INTERIOR) PIPE AS DIRECTED BY THE ENGINEER. SLOPE: 1/4" PER FOOT MINIMUM.

COVER DRAIN WITH APPROVED MATERIAL

DRIVEWAY PROFILE WITH DRAIN PIPE

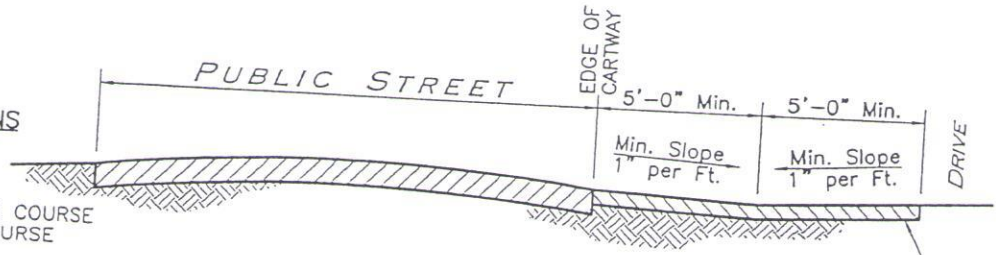

APPROVED APRON MATERIAL

DRIVEWAY PROFILE WITHOUT DRAIN PIPE

DRIVEWAY SPECIFICATIONS

BITUMINOUS

- 8" AGGREGATE BASE COURSE
- 1 1/2" ID-2 BITUMINOUS BINDER COURSE
- 1" ID-2 BITUMINOUS WEARING COURSE

CONCRETE

- 4" CRUSHED 28 STONE BASE
- 6" 4000 PSI CLASS A CONCRETE DRIVEWAY

AGGREGATE

- 6" PA No. 2A LIMESTONE

**DANIEL C. BAKER ASSOCIATES, INC.**  
 CONSULTING ENGINEERS, SURVEYORS AND PLANNERS  
 6056 TUSCARAWAS ROAD  
 BEAVER, PENNSYLVANIA 15009

Date: 9/14/00  
 Scale: N. T. S.  
 Drawing No.: OBDT-SD005  
 CAD File: 08-DTLS

Standard Detail for  
**RESIDENTIAL DRIVEWAY**

Borough of Ohioville  
 Beaver County, Pennsylvania