



PLAN VIEW

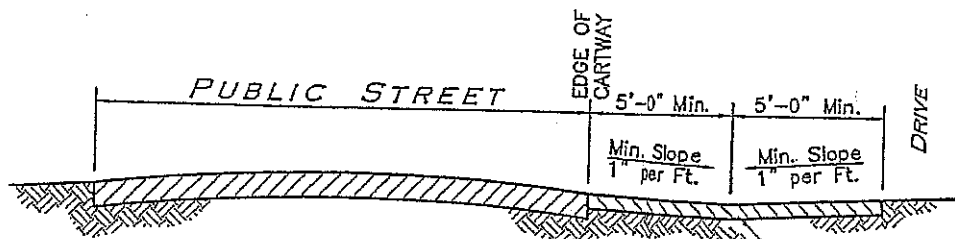

15" CMP, 15" RCP OR 15" HDPE (SMOOTH INTERIOR) PIPE AS DIRECTED BY THE ENGINEER. SLOPE: 1/4" PER FOOT MINIMUM.

COVER DRAIN WITH APPROVED MATERIAL

DRIVEWAY PROFILE WITH DRAIN PIPE

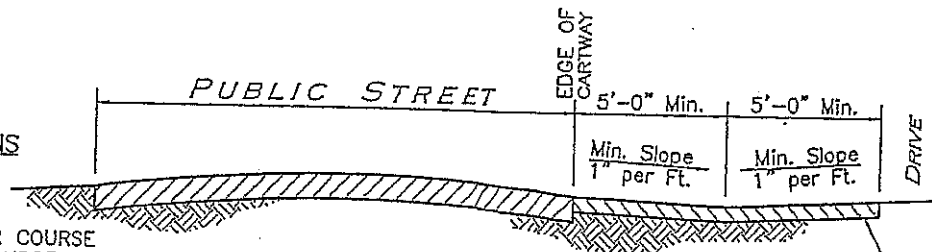

APPROVED APRON MATERIAL

DRIVEWAY PROFILE WITHOUT DRAIN PIPE

DRIVEWAY SPECIFICATIONS

BITUMINOUS

- 8" AGGREGATE BASE COURSE
- 1 1/2" ID-2 BITUMINOUS BINDER COURSE
- 1" ID-2 BITUMINOUS WEARING COURSE

CONCRETE

- 4" CRUSHED 2B STONE BASE
- 6" 4000 PSI CLASS A CONCRETE DRIVEWAY

AGGREGATE

- 6" PA No. 2A LIMESTONE

DANIEL C. BAKER ASSOCIATES, INC.
 CONSULTING ENGINEERS, SURVEYORS AND PLANNERS
 6056 TUSCARAWAS ROAD
 BEAVER, PENNSYLVANIA 15009

Date:	9/14/00
Scale:	N. T. S.
Drawing No.:	OBDT-SD005
CAD File:	OB-DTLS

Standard Detail for
RESIDENTIAL DRIVEWAY

Borough of Ohioville
 Beaver County, Pennsylvania